
Product Sheet

05.05.2024



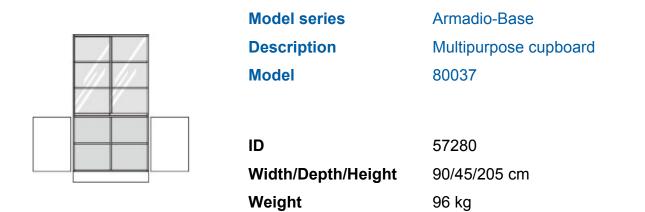

at the bottom 2 revolving doors with drilled stop damping, aperture angle 270°, hinges with automatic hold-closed function, handle olive, at the top 2 sliding glasses of safety glass (ESG), aluminum running guides with grips.

Equipment: fixed intermediate shelf, at the bottom and at the top center partition, 6 heightadjustable shelves with drilled shelf assurance, plastic plinth panel with bottom-sided sealing lip.

Changes and errors reserved. Illustrations similar.